


## basiCube 10

### Steckerposition und Pinbelegung

---

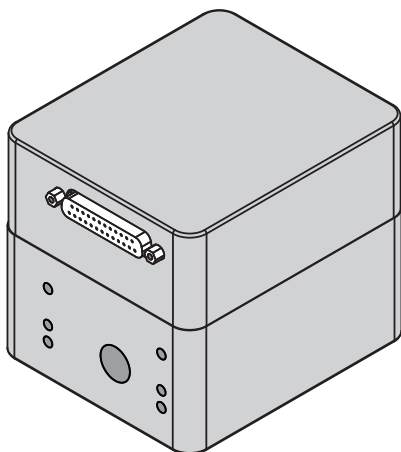

**DIGITAL POWER IN**  
(25-polige Sub-D-Buchse)

- 15 V (25)	(13) - 15 V
GND (24)	(12) - 15 V
GND (23)	(11) GND
+ 15 V (22)	(10) + 15 V
DO NOT CONNECT (21)	(9) + 15 V
DO NOT CONNECT (20)	(8) DO NOT CONNECT
STATUS+ (19)	(7) DO NOT CONNECT
DO NOT CONNECT (18)	(6) STATUS-
CHAN2+ (17)	(5) DO NOT CONNECT
CHAN1+ (16)	(4) CHAN2-
SYNC+ (15)	(3) CHAN1-
CLOCK+ (14)	(2) SYNC-
	(1) CLOCK-